### Ningbo Haider Import and Export Co., Ltd

Tel: +86-574-87167915 Email: info@ningbohaider.com

Add: 1st Building, No. 108, Kaiyuan Road, Jiangbei District, Ningbo 315100 Zhejiang, China



1

## **Quick Grow** was founded on 2010, since the establishment in over ten years,

we dedicated to the research, development and manufacture of LED plants grow lights. The own brand Quick Grow is gradually highly recognized by the market. We tried, we failed, and we will keep on trying to create the brilliant light!


We specialize in cutting-edge LED grow lights. We also have a horticultural product line like gallon pots, plant trays, watering system, growing tnets, and small greenhouse. Last but not least, we provide innovative, high quality products that are built to last and supports. them with technical expertise and outstanding customer service.





QUICK GROW single light bars equipped with full spectrum LEDs, which is similar to the sunlight at noon, an ideal for all sorts of indoor plants at all growth stages. "V-shaped" housing design provides more lights in the same space to get more PPFD, which is effectively promotes the chlorophyll synthesis and photosynthesis.





# Single Light Bar



#### STRUCTURE IMAGE

[Combo Series]

|                    | TECHNICAL DATA        |
|--------------------|-----------------------|
| rce                | World-Class LED Chips |
| er                 | 12W/18W/24W/36W/48W   |
| age                | Autosensing 120-240V  |
|                    | 1.6~1.82 umol/J       |
| <i>l</i> anagement | Passive               |
| emperature         | -10°C~40°C            |
|                    | No                    |
| ribution           | 120°                  |
|                    | >50,000hrs            |
| ctor               | ≥80%                  |
| ons                | UL,RoHs,CE            |
| Height             | ≥6" Above the Plants  |
|                    | 2 Years               |
|                    |                       |


| WER CORD  | PLUG | ACCESSORIES                     |
|-----------|------|---------------------------------|
| 3"/ 160CM | US   | 1xPower cord with On/Off switch |
| 2"/ 183CM | EU   | 1xlink cord                     |
| Efficacy  | UK   | 4xhanging clip                  |
|           |      | 2xscrew set                     |
|           |      | 2xzinc plated hanger            |

| PPF(umol/s) | DIMENSION                 | NET WEIGHT |
|-------------|---------------------------|------------|
| 157~175     | 48"x21"X2"/120cm*60cm*5cm | 4lb/1.8kg  |




A CONTRACT

[Combo Series]

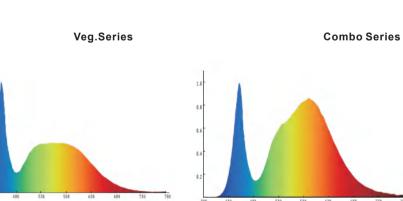


SPECTRUM



Ultimate Serles

Pro.Series

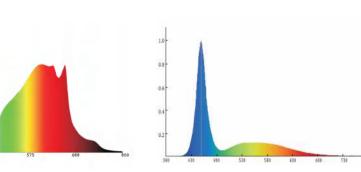







Suitable for balconies, greenhouses, darkroom, office. Widely apply to the culture solution, gardening, potted plants, especially when the plants need extra light when raining, snowing, dark indoor, etc.



### **GROUPED LIGHT-2PCS**



| TECHNICAL DATA |                      |  |
|----------------|----------------------|--|
| rce            | World-Class LED Chip |  |
| er             | 96V                  |  |
| age            | Autosensing 100-270  |  |
|                | 1.6~1.82 umol/       |  |
| lanagement     | Passiv               |  |
| emperature     | -10°C~40°C           |  |
|                | N                    |  |
| ribution       | 120                  |  |
|                | >50,000hr            |  |
| ctor           | ≥80%                 |  |
| ons            | UL,RoHs,Cl           |  |
| Height         | ≥6" Above the Plant  |  |
|                | 2 Year               |  |

ight So

Input Pov

nput Vol

Efficacy

hermal

Working


Light Dist Lifetime Power Fa


Certifica

| PLUG | ACCESSORIES                     |
|------|---------------------------------|
| US   | 1xPower cord with On/Off switch |
| EU   | 1xlink cord                     |
| UK   | 4xhanging clip                  |
|      | 2xscrew set                     |
|      | 2xzinc plated hanger            |

| PPF(umol/s) | DIMENSION                 | NET WEIGHT |
|-------------|---------------------------|------------|
| 157~175     | 48"x21"X2"/120cm*60cm*5cm | 4lb/1.8kg  |
|             |                           |            |


#### SPECTRUM





#### STRUCTURE IMAGE

#### [TOP VIEW]

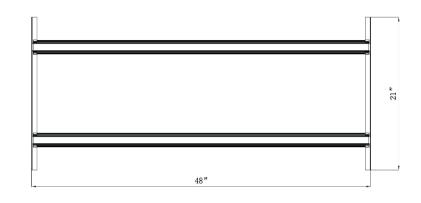

#### [SIDE VIEW]

[TOP ANGLE VIEW]







Adjustable 3pc grow light fixture for flowering plants, is with full spectrum panel design, the intensity can be adjusted according to the needs of plants which are infinitely close to natural sunlight, suitable for the entire growth proccess of all plants in the whole stage of the room, and the rapid plant response from seeds to flowers.



### **GROUPED LIGHT-3PCS**



#### STRUCTURE IMAGE

|            | TECHNICAL DATA                  |
|------------|---------------------------------|
| ce         | World-Class LED Chips           |
| er         | 144W                            |
| age        | Autosensing 100-270V            |
|            | 1.6~1.82 umol/J                 |
| lanagement | Passive                         |
| emperature | -10°C~40°C                      |
|            | No                              |
| ibution    | 120°                            |
|            | >50,000hrs                      |
| ctor       | ≥80%                            |
| ons        | UL,RoHs,CE                      |
| Height     | $\geqslant$ 6" Above the Plants |
|            | 2 Years                         |
|            |                                 |

Light Sou Input Pow

Input Vol

Efficacy

hermal

Working<sup>-</sup>

Light Distr


Power Fac


Certificat

| PLUG | ACCESSORIES                     |
|------|---------------------------------|
| US   | 1xPower cord with On/Off switch |
| EU   | 2xlink cord                     |
| UK   | 4xhanging clip                  |
|      | 2xscrew set                     |
|      | 2xzinc plated hanger            |

| PPF(umol/s) | DIMENSION                 | NET WEIGHT |
|-------------|---------------------------|------------|
| 231~262     | 48"x21"X2"/120cm*60cm*5cm | 6lb/2.7kg  |
|             |                           |            |

#### SPECTRUM









[TOP ANGLE VIEW]









Consist of full spectrum 6400k/3000k, infinitely close to natural light, providing everything plants desired in the natural sunlight. It's suitable for all plants growing stages, rapids plant response from seed to flower to harvest, increasing yield and crop quality. Uniform and wide-beam light distribution for your plant's optimal growth.



### **GROUPED LIGHT-4PCS**



| TECHNICAL DATA |                                 |  |
|----------------|---------------------------------|--|
| urce           | World-Class LED Chips           |  |
| wer            | 192W                            |  |
| tage           | Autosensing 100-270V            |  |
|                | 1.6~1.82 umol/J                 |  |
| Management     | Passive                         |  |
| Temperature    | -10°C~40°C                      |  |
|                | No                              |  |
| tribution      | 120°                            |  |
|                | >50,000hrs                      |  |
| actor          | ≥80%                            |  |
| tions          | UL,RoHs,CE                      |  |
| g Height       | $\geqslant$ 6" Above the Plants |  |
| /              | 2 Years                         |  |

Input Pov

Input Vo

Efficacy

Thermal Working


Dimming Light Dist Lifetime Power Fa Certificat


Mounting Warranty

| PLUG | ACCESSORIES                     |
|------|---------------------------------|
| US   | 1xPower cord with On/Off switch |
| EU   | 3xlink cord                     |
| UK   | 4xhanging clip                  |
|      | 2xscrew set                     |
|      | 2xzinc plated hanger            |

| PPF(umol/s) | DIMENSION                 | NET WEIGHT |
|-------------|---------------------------|------------|
| 308~350     | 48"x21"X2"/120cm*60cm*5cm | 8lb/3.5kg  |
|             |                           |            |


#### SPECTRUM





#### STRUCTURE IMAGE

#### [TOP VIEW]

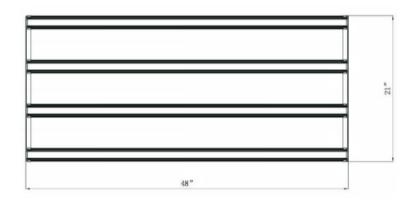


#### [SIDE VIEW]

[TOP ANGLE VIEW]









7pcs grow light board for medicinal plants, utilizes a full spectrum of colors for germinating seedlings and young plants consuming 336W of power. The bloom option implements more red wavelengths to simulate late summer and is most suited for plants in the flowering stage. VEG and BLOOM can be used together to encourage maximum growth performance from seedling to harvest.



### **GROUPED LIGHT-7PCS**

World-Class LED Chips

Autosensing 100-270V

1.6~1.82 umol/J

336W

Passive -10°C~40°C

No

120°

>50,000hrs

UL,RoHs,CE

 $\geqslant$ 6" Above the Plants

14lb/6.2kg


≥80%

2 Years



#### STRUCTURE IMAGE

#### [TOP VIEW]

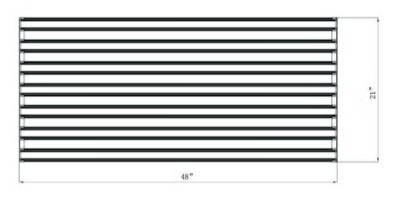





[TOP ANGLE VIEW]










QuickGrow is one of the most professional manufactures in China to research, create and produce of high-quality green energy-saving lighting products over ten year.

·••, ·••,



SPECTRUM

**TECHNICAL DATA** 

1xPower cord with On/Off switch

6xlink cord

4xhanging clip

2xzinc plated hanger

2xscrew set

DIMENSION

48"x21"X2"/120cm\*60cm\*5cm

Light Source

Input Power

Input Voltage

Thermal Management

Working Temperature

Light Distribution

Efficacy

Dimming

Lifetime

Power Factor

Certifications

Warranty

Mounting Height

US

EU

UK

538~612



Waterproof Grow Light Panel Wifi Control, newest grow light LED technology, with bigger size, super bright high efficient PPFD/LUMEN output, makes you get 30% higher yield compare traditional led lights, less pay but get more yield, bring a amazing grow trip to any home grower.

Only consume 350 Watt true output! It saves up to 80% energy than other led grow lights. Suggest to hang height at 12"-32", Perfect coverage is 3x4ft at 22".





### WATERPROOF MODEL

#### STRUCTURE IMAGE

#### [TOP VIEW]



#### [SIDE VIEW]

| QUICK G | W | QUICK GROW |
|---------|---|------------|
| N=      |   | I          |

[TOP ANGLE VIEW]



| TECHNICAL DATA |                       |  |
|----------------|-----------------------|--|
| urce           | World-Class LED Chips |  |
| wer            | 350W                  |  |
| tage           | Autosensing 120-240V  |  |
|                | 1.43~1.94 umol/s      |  |
| Management     | Passive               |  |
| Temperature    | -10°C~40°C            |  |
|                | No                    |  |
| tribution      | 120                   |  |
|                | >50,000hrs            |  |
| actor          | ≥80%                  |  |
| tions          | ETL                   |  |
| g Height       | ≥6" Above the Plants  |  |
| ,              | 2 Years               |  |
| I              | IP 65                 |  |

nput Po

nput Vo

Efficacy

Thermal

Working

Light Dist

Lifetime Power Fa

Certifica


Mountin Warrant


IP Rating


| PLUG | ACCESSORIES                     |
|------|---------------------------------|
| US   | 1xPower cord with On/Off switch |
| EU   | 1xlink cord                     |
| UK   | 4xhanging clip                  |
|      | 2xscrew set                     |

| PPF(umol/s) | DIMENSION                 | NET WEIGHT |
|-------------|---------------------------|------------|
| 560~637     | 48"x21"X2"/120cm*60cm*5cm | 14lb/6.2kg |
|             |                           |            |

#### SPECTRUM





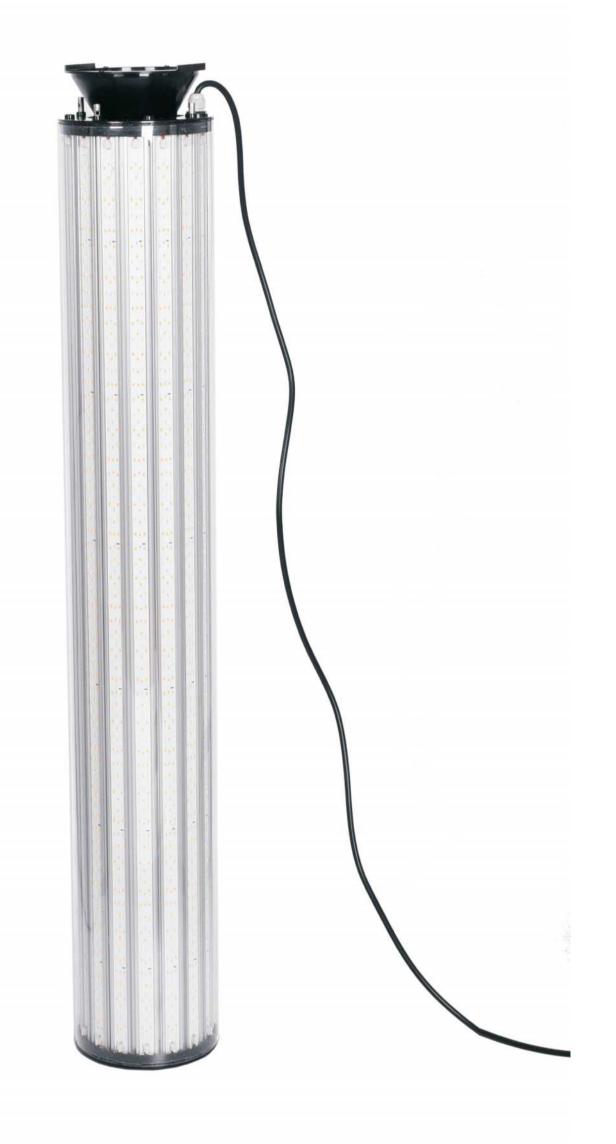

360 degree grow light provides full spectrum with high PAR value. It comes with a nice hanging system and goes up in a short time. Allows even and uniform distribution of light, with no hot spots. Suitable for various application such as plant shelves, plant tents, hydroponics growing rooms, greenhouses, etc.

### **360 DEGREE MODEL**



| TECHNICAL DATA |                       |  |
|----------------|-----------------------|--|
| rce            | World-Class LED Chips |  |
| er             | 650W                  |  |
| age            | Autosensing 120-240V  |  |
|                | 1.43~1.94 umol/J      |  |
| lanagement     | Passive               |  |
| emperature     | -10°C~40°C            |  |
|                | Yes                   |  |
| ribution       | 360                   |  |
|                | >50,000hrs            |  |
| ctor           | ≥80%                  |  |
| ons            | ETL                   |  |
| Height         | ≥6" Above the Plants  |  |
|                | 2 Years               |  |
|                | IP 45                 |  |

Light Sou Input Pov

Input Vol Efficacy

Thermal

Working

Light Dist

Power Fa


Certificat


IP Rating

| PLUG | ACCESSORIES                     |
|------|---------------------------------|
| US   | 1xPower cord with On/Off switch |
| EU   | 4xhanging rope                  |
| UK   | 4xhanging clip                  |
|      | 2xscrew set                     |

| IT |
|----|
| I  |
|    |


#### SPECTRUM





#### STRUCTURE IMAGE





[SIDE VIEW]

